


Parts List & Assembly Instructions for Models D-91, D-93, D-95 & D-99 Cattle Oilers

For fly control, use Diesel Fuel and Ectiban-25 or Malathion

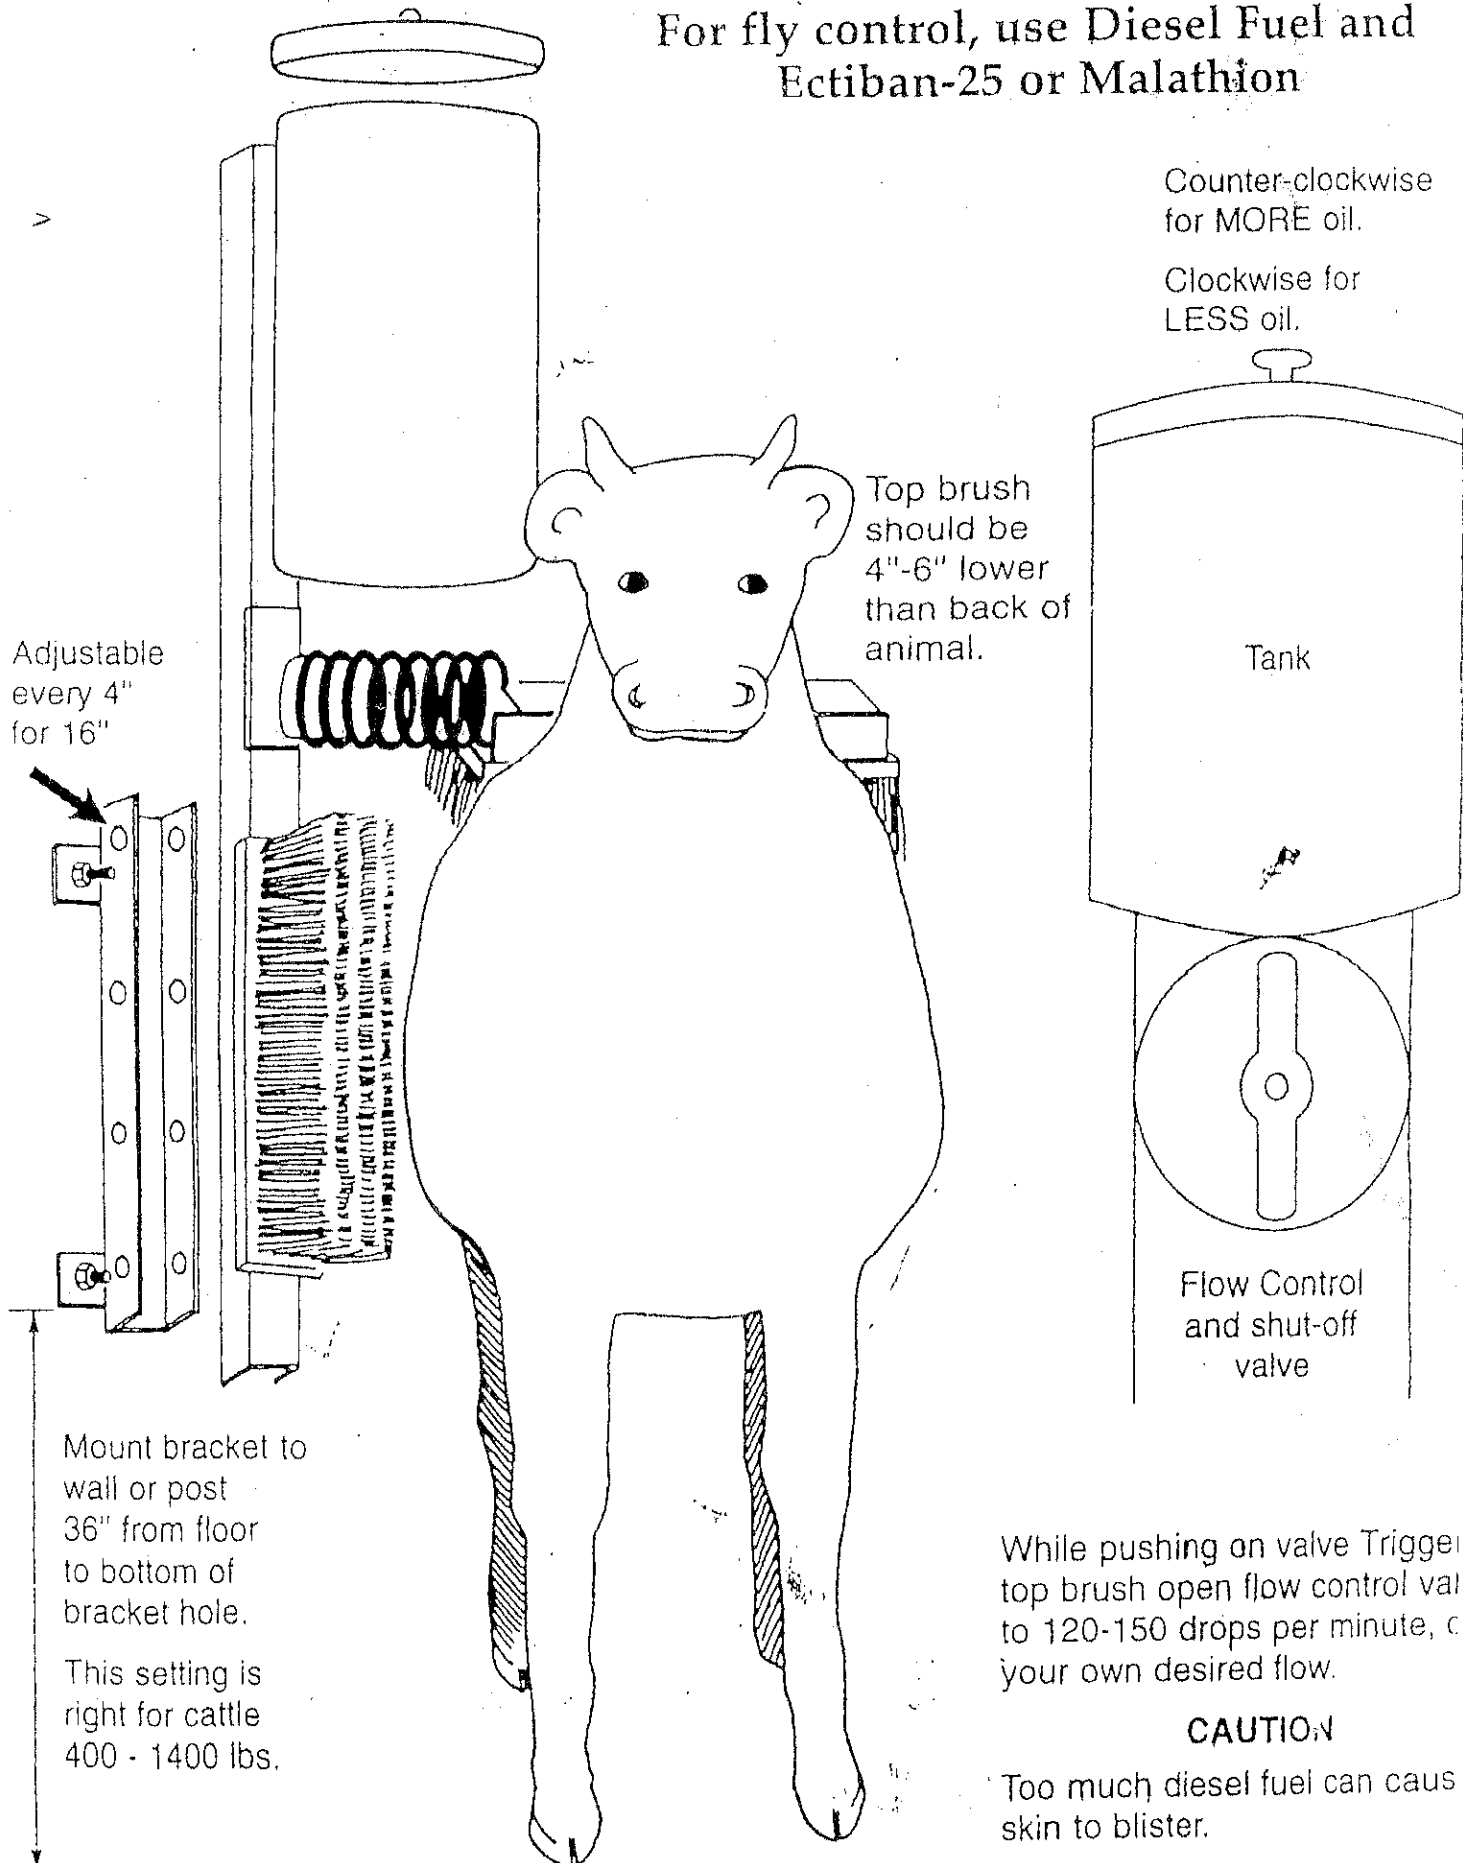

Counter-clockwise for MORE oil.

Clockwise for LESS oil.

Top brush should be 4"-6" lower than back of animal.

Tank

Flow Control and shut-off valve

Adjustable every 4" for 16"

Mount bracket to wall or post 36" from floor to bottom of bracket hole.

This setting is right for cattle 400 - 1400 lbs.

While pushing on valve Trigger top brush open flow control valve to 120-150 drops per minute, or your own desired flow.

CAUTION

Too much diesel fuel can cause skin to blister.